



# RA Series

Economy Price Computing Scale



RA Series rear display



## Accuracy, Consistency and OHAUS Reliability

The OHAUS RA Series price computing scale provides the perfect blend of ruggedness for retail environments and portability for operator convenience. Its rugged housing, sleek profile and small footprint make it an ideal candidate for any counter. The weight, unit and total price of a purchase can be easily seen on the front and back LCD displays. The OHAUS RA Series is easy to use, easy to clean and requires minimum maintenance, making it an ideal solution for your basic retail applications.

Applications include portioning, packaging and retail sale of meats, cheese, fruits, vegetables, confections, baked goods, coffee, tea and other items for sale to the public.

### Standard Features Include:


- High-grade polymer housing with removable stainless steel pan
- Large, easy-to-read backlit LCD displays
- 3-window front and rear operator and customer displays
- By-Count price computing function
- Memory storage up to 25 PLU's
- Accumulation of total price
- Separate Tare and Zero function keys
- Raised, positive feedback keys with key-press beeper
- Battery operation with sleep and auto-shut off power saving feature
- NTEP approved 3,000d resolution

# RA Series Economy Price Computing Scale

## Specifications

| Model                                 | RA6US   | RA15US          |
|---------------------------------------|---|-----------------|
| NTEP Certified Capacity x Readability | 15 lb x 0.005 lb  | 30 lb x 0.01 lb |
| NTEP Certified Resolution             | 3,000d  |                 |
| Construction                          | High-grade polymer housing with removable stainless steel pan   |                 |
| Pan Dimensions (W x D)                | 7.9 x 11.4 in / 200 x 290 mm  |                 |
| Leveling Components                   | 4 adjustable rubber feet with integral rear mounted level bubble indicator  |                 |
| Display                               | 3-window backlit LCDs, front and rear, Weight-Unit Price-Total Price<br>6-digit (5-digit for Weight), 7-segment, 0.5 in / 12 mm high characters |                 |
| Weighing Unit                         | lb  |                 |
| Application Modes                     | Price computing for items by count and weight, 25 PLU memory, Accumulation  |                 |
| Keyboard                              | Numeric, 17-key raised, tactile membrane switch with key-press beeper   |                 |
| Span Calibration                      | 2/3 and full scale capacity   |                 |
| Tare Range                            | To full capacity by subtraction   |                 |
| Zero Range                            | At power-on: $\pm 10\%$ / Keyboard: $\pm 2\%$ of full scale capacity  |                 |
| Stabilization Time                    | Within 2 seconds  |                 |
| Power                                 | 12VDC 800mA AC Adapter (included) / 6 D-cell alkaline batteries (not included)  |                 |
| Battery Operation                     | 60 ~ 70 hours of continuous use   |                 |
| Safe Overload                         | 150% of full scale capacity   |                 |
| Operating Temperature Range           | 14°F to 104°F / -10°C to 40°C   |                 |
| Storage Temperature Range             | -4°F to 158°F / -20°C to 70°C   |                 |
| Humidity Range                        | 10% to 85% humidity, non-condensing   |                 |
| Scale Dimensions (W x D x H)          | 12.3 x 12.9 x 4.6 in / 312 x 328 x 117 mm   |                 |
| Shipping Dimensions (W x D x H)       | 14.8 x 14.8 x 8.5 in / 376 x 376 x 216 mm   |                 |
| Scale Unit Weight                     | 7.0 lb / 3.2 kg   |                 |
| Shipping Weight                       | 10.6 lb / 4.8 kg  |                 |

## Outline Dimensions

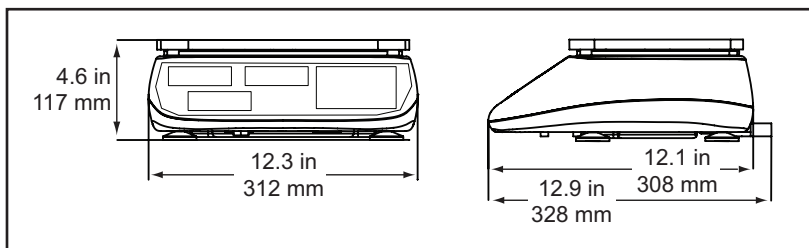

## Compliance

- **Safety and EMC:** EN60950, EN61326, FCC, CE,  $cUL_{US}$
- **Legal-For-Trade:** NTEP CC No. 08-058
- **Quality:** OHAUS quality management system registered to ISO 9001:2008

## OHAUS CORPORATION

\* 7 Campus Drive  
Suite 310  
Parsippany, NJ 07054 USA

Tel: 800.672.7722  
973.377.9000  
Fax: 973.944.7177

[www.ohaus.com](http://www.ohaus.com)

*With offices throughout Europe,  
Asia, and Latin America*

\* **ISO 9001**  
Registered Quality Management System